

Standard Equipment & Options

Standard Equipment	Optional Equipment
Folding ROPS Frame	Site Lights
Reversing Alarm	Road Lights (RTA)
Flashing Beacon	Rear View Mirror
Towing Bracket	Grassland Tyres

Dealer

Effective Date: 01 January 2008. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries. © 2008 Terex Corporation. ♻️ Printed on material using 55% recycled fibre from both pre and post-consumer sources, together with 45% virgin ECF fibre from sustainable forests. DS PTPS3 1108-EN

TEREX Construction
 Central Boulevard, ProLogis Park, Coventry, England CV6 4BX
 Tel +44 (0) 2476 339400 Fax +44 (0) 2476 339500
 Email enquiries@terexce.com www.terex.co.uk

POWER TIP / POWER SWIVEL SITE DUMPERS



PS3000 PT3000

Specification

Payload	3000 kg
Gross Engine Power	32.4 kW (43.2 hp)
Max Skip Capacity	1950/1870 Litres

Features

- Large heaped skip capacities.
- "Rental Tough" designs and fabrications to keep you working in the toughest of conditions.
- Thick steel skip base plate with reinforced box sections for high strength and longevity.
- Exceptional service access and ease of maintenance built into every machine.
- High ground clearance, low centre of gravity for superb stability and site accessibility.
- Powerful, reliable and economical Kubota engines.
- Power Tip (PT) for forwards tip applications. Power Swivel (PS) enables effective placement of load to either side - useful for trench filling or small sites.

Specifications

Performance		
	PT3000	PS3000
Payload (kg)	3000	3000
Unladen Weight (kg)	2260	2550
Skip Capacity - Water (ltr)	1250	1000
- Struck (ltr)	1600	1500
- Heaped (ltr)	1950	1870
Engine	Kubota V2203M	
- Net Power - kW (hp)	32.4 (43.2)	
- Capacity	2197 cc	
- Maximum Torque	145 Nm	
Tyre Size	11.5/80x15.3x8ply	
Drive	3/1 Manual - permanent 4WD	
Max Travel Speed - mph (kph)	11.8 (19.0)	11.8 (19.0)
Gradeability	25 %	25 %
Fuel Tank Capacity	37 Litres	37 Litres
Hydraulic Tank Capacity	37 Litres	37 Litres

Hydraulic System (Gear Pump)

	PT3000	PS3000
Flow rate	30 l/min	30 l/min
Operating Pressure	172 bar	172 bar

Braking System

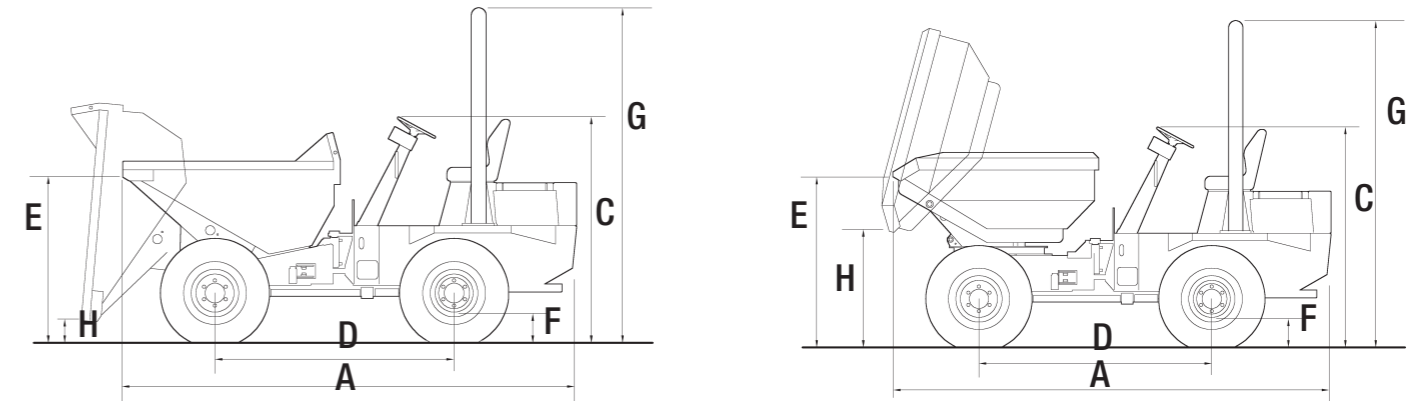
	PT3000	PS3000
Working Brake	Foot Brake - Oil Immersed Discs on Front/Rear	
Parking Brake	Over Centre Handbrake - Oil Immersed Disc Front Axle	

Electrical System

	PT3000	PS3000
Voltage	12V	12V
Battery	74 Ah	74 Ah
Alternator	55 A	55 A

Dimensions

B = Overall Width (not shown)


Dimensions (mm)

		PT3000	PS3000
A	Total Length	3755	3850
B	Total Width (not shown)	1950	1860
C	Height to Top of Steering Wheel	1860	1860
D	Wheelbase	1950	1950
E	Height to Front Lip of Skip (untipped)	1430	1500
F	Ground Clearance	300	300
G	Height to Top of ROPS (raised)	2680	2680
H	Height to Front Lip of Skip (tipped)	250	1100
	Turning Radius to Outside of Skip	4350 mm	4665 mm
	Steering Angle	+/- 30°	+/- 30°
	Oscillation	+/- 10.5°	+/- 10.5°
	Tipping Type	Forward	Swing